



Colors are intended as a guide only and may vary from actual tile. Sizes listed are nominal. Please check samples before making final selection and to get actual dimensions for layout. See reverse side for additional product information.

ANTIQUE LUX | Antique Portofino

Antique Lux is a new generation of marble look porcelain. Gazzini always has a special approach with their marble looks and, with this line, they are taking advantage of exciting new technology to achieve a final look that truly looks and feels like real marble. The glazes are applied in a way that perfectly follows the surface structure creating veins that you can feel as well as see. The special finish is made the same way as fully polished material, with polishing wheels that rub the surface, but without going as deep as with full polishing, creating an elegant satin finish. The finish also has technical advantages such as better resistance to scratching and no risk of microporosities. By the innovative combination of these two techniques, we have a marble look that is extremely natural to the touch as well as stunningly beautiful. The line comes in 6 colors that are each their own marble. Please see other product pages for additional colors.


Size - Rectified

12 x 24 GIALAP/1224

Mosaic

Brick GIALAP/BK


The Brick Mosaic sheets can be used as field or cut and combined with field tile to create cost effective strips or decorative inserts.

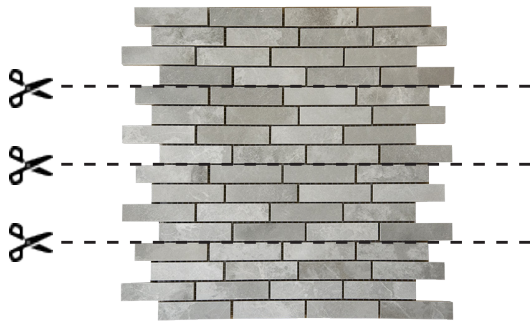

Trim

Available in all colors. The surface bullnose is made from field tile that is cut, ground and reglazed.

GIALAP/SBN 3 x 24 Surface Bullnose

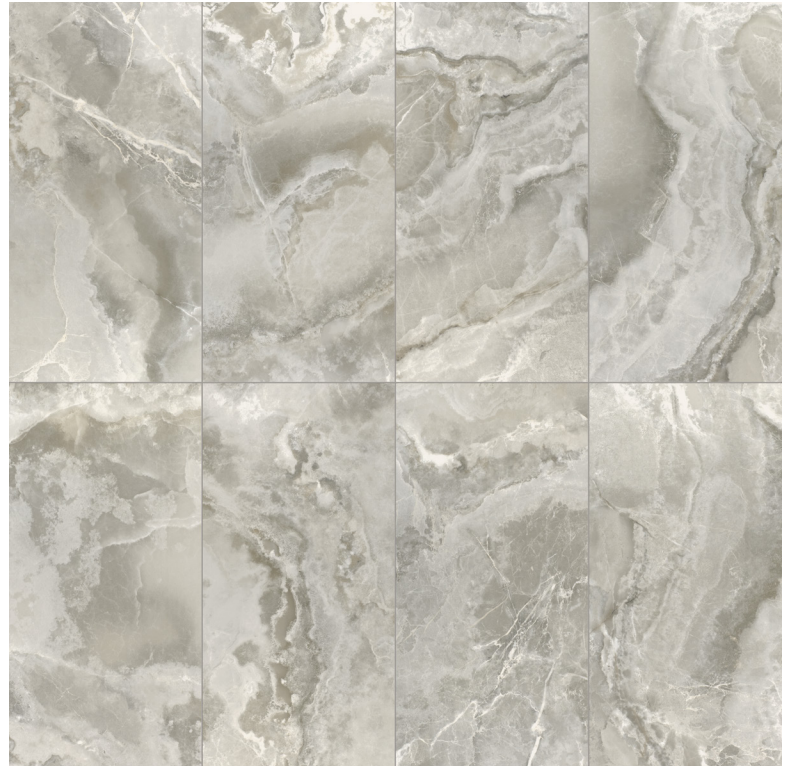

Antique Portofino - With Onyx style graphics, it is a warm grey/taupe.

Usage & Installation Information

Antique Lux is suitable for residential and light commercial use. It is important to blend tile within each carton and from multiple cartons during installation, as well as changing the orientation of pieces with similar graphics to attain a proper mix.

Most Italian manufacturers recommend a maximum offset of 8" (20 cm) on all large format tiles when setting a running bond. Please refer to ANSI requirements for setting large format tiles, ANSI A 108.2 section 4.3.8. Using a leveling system can improve the installation of this product.

Technical Information

Physical Properties	Norms	Value	Physical Properties	Norms	Value
Deep Abrasion Resistance	10545-6	<175mm ³ Conforms	Dynamic (DCOF) Coefficient of Friction	ANSI A137.1:2012	≥ 0.42 Wet
Water Absorption	10545-3	≤0.5% Conforms	The Coefficient of Friction is a general guide only. Testing may vary with different production runs and with different testing labs. As noted in the American with Disabilities Act (ADA) the coefficient of friction varies considerably due to facts not under the control of entities such as the manufacturers and distributors. These factors include, but are not limited to, contaminants, slope of terrain, drainage conditions, adjacent surfaces, etc. Suitability for any installation can only be determined by a site examination of all conditions that could affect the slip resistance of the tile being installed. Continual cleaning and maintenance must be performed once the tile has been installed.		
Frost Resistance	10545-12	Resistant			
Slip Resistance	DIN 51130 R	R9			



Colors are intended as a guide only and may vary from actual tile. Sizes listed are nominal. Please check samples before making final selection and to get actual dimensions for layout. See reverse side for additional product information.

ANTIQUE LUX | Amalfi Lux

Antique Lux is a new generation of marble look porcelain. Gazzini always has a special approach with their marble looks and, with this line, they are taking advantage of exciting new technology to achieve a final look that truly looks and feels like real marble. The glazes are applied in a way that perfectly follows the surface structure creating veins that you can feel as well as see. The special finish is made the same way as fully polished material, with polishing wheels that rub the surface, but without going as deep as with full polishing, creating an elegant satin finish. The finish also has technical advantages such as better resistance to scratching and no risk of microporosities. By the innovative combination of these two techniques, we have a marble look that is extremely natural to the touch as well as stunningly beautiful. The line comes in 6 colors that are each their own marble. Please see other product pages for additional colors.


Size - Rectified

12 x 24 GIALAL/1224

Mosaic

Brick GIALAL/BK

The Brick Mosaic sheets can be used as field or cut and combined with field tile to create cost effective strips or decorative inserts.

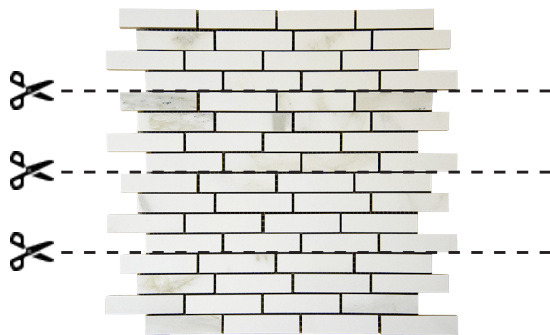

Trim

Available in all colors. The surface bullnose is made from field tile that is cut, ground and reglazed.

GIALAL/SBN 3 x 24 Surface Bullnose



Amalfi Lux - Inspired by the Calacatta Oro Borghini marble, it is white with gold veining.

Usage & Installation Information

Antique Lux is suitable for residential and light commercial use. It is important to blend tile within each carton and from multiple cartons during installation, as well as changing the orientation of pieces with similar graphics to attain a proper mix.

Most Italian manufacturers recommend a maximum offset of 8" (20 cm) on all large format tiles when setting a running bond. Please refer to ANSI requirements for setting large format tiles, ANSI A 108.2 section 4.3.8. Using a leveling system can improve the installation of this product.

Technical Information

Physical Properties	Norms	Value	Physical Properties	Norms	Value
Deep Abrasion Resistance	10545-6	<175mm ³ Conforms	Dynamic (DCOF) Coefficient of Friction	ANSI A137.1:2012	≥ 0.42 Wet
Water Absorption	10545-3	≤0.5% Conforms	The Coefficient of Friction is a general guide only. Testing may vary with different production runs and with different testing labs. As noted in the American with Disabilities Act (ADA) the coefficient of friction varies considerably due to facts not under the control of entities such as the manufacturers and distributors. These factors include, but are not limited to, contaminants, slope of terrain, drainage conditions, adjacent surfaces, etc. Suitability for any installation can only be determined by a site examination of all conditions that could affect the slip resistance of the tile being installed. Continual cleaning and maintenance must be performed once the tile has been installed.		
Frost Resistance	10545-12	Resistant			
Slip Resistance	DIN 51130 R	R9			

ANTIQUE LUX | Avenue White



Colors are intended as a guide only and may vary from actual tile. Sizes listed are nominal. Please check samples before making final selection and to get actual dimensions for layout. See reverse side for additional product information.

ANTIQUE LUX | Avenue White

Antique Lux is a new generation of marble look porcelain. Gazzini always has a special approach with their marble looks and, with this line, they are taking advantage of exciting new technology to achieve a final look that truly looks and feels like real marble. The glazes are applied in a way that perfectly follows the surface structure creating veins that you can feel as well as see. The special finish is made the same way as fully polished material, with polishing wheels that rub the surface, but without going as deep as with full polishing, creating an elegant satin finish. The finish also has technical advantages such as better resistance to scratching and no risk of microporosities. By the innovative combination of these two techniques, we have a marble look that is extremely natural to the touch as well as stunningly beautiful. The line comes in 6 colors that are each their own marble. Please see other product pages for additional colors.


Size - Rectified

12 x 24 GIALAW/1224

Mosaic

Brick GIALAW/BK

The Brick Mosaic sheets can be used as field or cut and combined with field tile to create cost effective strips or decorative inserts.

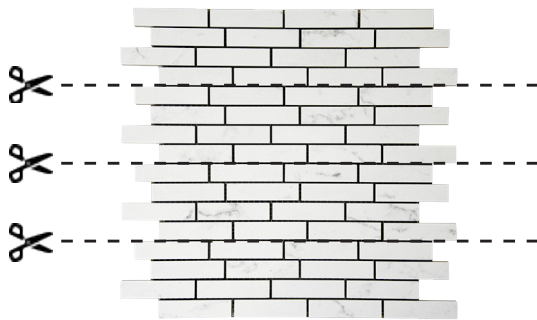

Trim

Available in all colors. The surface bullnose is made from field tile that is cut, ground and reglazed.

GIALAW/SBN 3 x 24 Surface Bullnose



Avenue White - Inspired by the Bianca Carrara and Venetino marbles, it is white with grey veins.

Usage & Installation Information

Antique Lux is suitable for residential and light commercial use. It is important to blend tile within each carton and from multiple cartons during installation, as well as changing the orientation of pieces with similar graphics to attain a proper mix.

Most Italian manufacturers recommend a maximum offset of 8" (20 cm) on all large format tiles when setting a running bond. Please refer to ANSI requirements for setting large format tiles, ANSI A 108.2 section 4.3.8. Using a leveling system can improve the installation of this product.

Technical Information

Physical Properties	Norms	Value	Physical Properties	Norms	Value
Deep Abrasion Resistance	10545-6	<175mm ³ Conforms	Dynamic (DCOF) Coefficient of Friction	ANSI A137.1:2012	≥ 0.42 Wet
Water Absorption	10545-3	≤0.5% Conforms	The Coefficient of Friction is a general guide only. Testing may vary with different production runs and with different testing labs. As noted in the American with Disabilities Act (ADA) the coefficient of friction varies considerably due to facts not under the control of entities such as the manufacturers and distributors. These factors include, but are not limited to, contaminants, slope of terrain, drainage conditions, adjacent surfaces, etc. Suitability for any installation can only be determined by a site examination of all conditions that could affect the slip resistance of the tile being installed. Continual cleaning and maintenance must be performed once the tile has been installed.		
Frost Resistance	10545-12	Resistant			
Slip Resistance	DIN 51130 R	R9			



Colors are intended as a guide only and may vary from actual tile. Sizes listed are nominal. Please check samples before making final selection and to get actual dimensions for layout. See reverse side for additional product information.

ANTIQUE LUX | Cortina White

Antique Lux is a new generation of marble look porcelain. Gazzini always has a special approach with their marble looks and, with this line, they are taking advantage of exciting new technology to achieve a final look that truly looks and feels like real marble. The glazes are applied in a way that perfectly follows the surface structure creating veins that you can feel as well as see. The special finish is made the same way as fully polished material, with polishing wheels that rub the surface, but without going as deep as with full polishing, creating an elegant satin finish. The finish also has technical advantages such as better resistance to scratching and no risk of microporosities. By the innovative combination of these two techniques, we have a marble look that is extremely natural to the touch as well as stunningly beautiful. The line comes in 6 colors that are each their own marble. Please see other product pages for additional colors.


Size - Rectified

12 x 24 GIALCW/1224

Mosaic

Brick GIALCW/BK

The Brick Mosaic sheets can be used as field or cut and combined with field tile to create cost effective strips or decorative inserts.

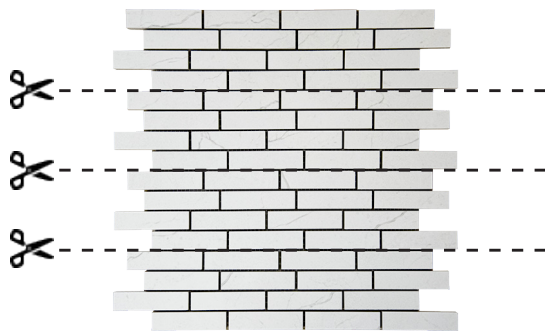

Trim

Available in all colors. The surface bullnose is made from field tile that is cut, ground and reglazed.

GIALCW/SBN 3 x 24 Surface Bullnose



Cortina White - Inspired by the Biancone marble but with well-defined, directional veining, it is white with grey veins.

Usage & Installation Information

Antique Lux is suitable for residential and light commercial use. It is important to blend tile within each carton and from multiple cartons during installation, as well as changing the orientation of pieces with similar graphics to attain a proper mix.

Most Italian manufacturers recommend a maximum offset of 8" (20 cm) on all large format tiles when setting a running bond. Please refer to ANSI requirements for setting large format tiles, ANSI A 108.2 section 4.3.8. Using a leveling system can improve the installation of this product.

Technical Information

Physical Properties	Norms	Value	Physical Properties	Norms	Value
Deep Abrasion Resistance	10545-6	<175mm ³ Conforms	Dynamic (DCOF) Coefficient of Friction	ANSI A137.1:2012	≥ 0.42 Wet
Water Absorption	10545-3	≤0.5% Conforms	The Coefficient of Friction is a general guide only. Testing may vary with different production runs and with different testing labs. As noted in the American with Disabilities Act (ADA) the coefficient of friction varies considerably due to facts not under the control of entities such as the manufacturers and distributors. These factors include, but are not limited to, contaminants, slope of terrain, drainage conditions, adjacent surfaces, etc. Suitability for any installation can only be determined by a site examination of all conditions that could affect the slip resistance of the tile being installed. Continual cleaning and maintenance must be performed once the tile has been installed.		
Frost Resistance	10545-12	Resistant			
Slip Resistance	DIN 51130 R	R9			

ANTIQUE LUX | Positano Blue



Colors are intended as a guide only and may vary from actual tile. Sizes listed are nominal. Please check samples before making final selection and to get actual dimensions for layout. See reverse side for additional product information.

ANTIQUÉ LUX | Positano Blue

Antique Lux is a new generation of marble look porcelain. Gazzini always has a special approach with their marble looks and, with this line, they are taking advantage of exciting new technology to achieve a final look that truly looks and feels like real marble. The glazes are applied in a way that perfectly follows the surface structure creating veins that you can feel as well as see. The special finish is made the same way as fully polished material, with polishing wheels that rub the surface, but without going as deep as with full polishing, creating an elegant satin finish. The finish also has technical advantages such as better resistance to scratching and no risk of microporosities. By the innovative combination of these two techniques, we have a marble look that is extremely natural to the touch as well as stunningly beautiful. The line comes in 6 colors that are each their own marble. Please see other product pages for additional colors.


Size - Rectified

12 x 24 GIALPB/1224

Mosaic

Brick GIALPB/BK

The Brick Mosaic sheets can be used as field or cut and combined with field tile to create cost effective strips or decorative inserts.

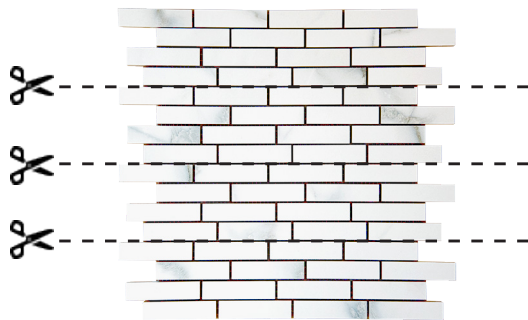

Trim

Available in all colors. The surface bullnose is made from field tile that is cut, ground and reglazed.

GIALPB/SBN 3 x 24 Surface Bullnose



Positano Blue - Inspired by Calacatta marble graphics but in a new color, it is a white with blue/grey veins.

Usage & Installation Information

It is important to blend tile within each carton and from multiple cartons during installation, as well as changing the orientation of pieces with similar graphics to attain a proper mix.

Most Italian manufacturers recommend a maximum offset of 8" (20 cm) on all large format tiles when setting a running bond. Please refer to ANSI requirements for setting large format tiles, ANSI A 108.2 section 4.3.8. Using a leveling system can improve the installation of this product.

Technical Information

Physical Properties	Norms	Value	Physical Properties	Norms	Value
Deep Abrasion Resistance	10545-6	<175mm ³ Conforms	Dynamic (DCOF) Coefficient of Friction	ANSI A137.1:2012	≥ 0.42 Wet
Water Absorption	10545-3	≤0.5% Conforms	The Coefficient of Friction is a general guide only. Testing may vary with different production runs and with different testing labs. As noted in the American with Disabilities Act (ADA) the coefficient of friction varies considerably due to facts not under the control of entities such as the manufacturers and distributors. These factors include, but are not limited to, contaminants, slope of terrain, drainage conditions, adjacent surfaces, etc. Suitability for any installation can only be determined by a site examination of all conditions that could affect the slip resistance of the tile being installed. Continual cleaning and maintenance must be performed once the tile has been installed.		
Frost Resistance	10545-12	Resistant			
Slip Resistance	DIN 51130 R	R9			

ANTIQUE LUX | Florence Grey



Colors are intended as a guide only and may vary from actual tile. Sizes listed are nominal. Please check samples before making final selection and to get actual dimensions for layout. See reverse side for additional product information.

ANTIQUE LUX | Florence Grey

Antique Lux is a new generation of marble look porcelain. Gazzini always has a special approach with their marble looks and, with this line, they are taking advantage of exciting new technology to achieve a final look that truly looks and feels like real marble. The glazes are applied in a way that perfectly follows the surface structure creating veins that you can feel as well as see. The special finish is made the same way as fully polished material, with polishing wheels that rub the surface, but without going as deep as with full polishing, creating an elegant satin finish. The finish also has technical advantages such as better resistance to scratching and no risk of microporosities. By the innovative combination of these two techniques, we have a marble look that is extremely natural to the touch as well as stunningly beautiful. The line comes in 6 colors that are each their own marble. Please see other product pages for additional colors.


Size - Rectified

12 x 24 GIALFG/1224

Mosaic

Brick GIALFG/BK

The Brick Mosaic sheets can be used as field or cut and combined with field tile to create cost effective strips or decorative inserts.

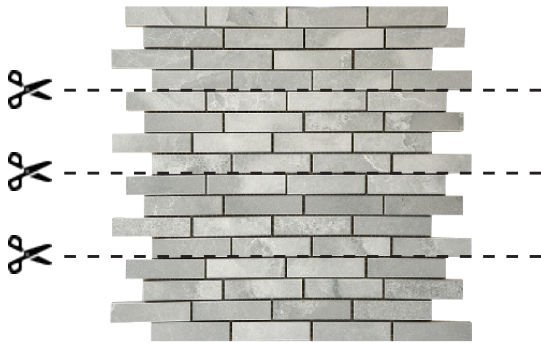

Trim

Available in all colors. The surface bullnose is made from field tile that is cut, ground and reglazed.

GIALFG/SBN 3 x 24 Surface Bullnose



Florence Grey - With Onyx style graphics, it is a medium grey.

Usage & Installation Information

Antique Lux is suitable for residential and light commercial use. It is important to blend tile within each carton and from multiple cartons during installation, as well as changing the orientation of pieces with similar graphics to attain a proper mix.

Most Italian manufacturers recommend a maximum offset of 8" (20 cm) on all large format tiles when setting a running bond. Please refer to ANSI requirements for setting large format tiles, ANSI A 108.2 section 4.3.8. Using a leveling system can improve the installation of this product.

Technical Information

Physical Properties	Norms	Value	Physical Properties	Norms	Value
Deep Abrasion Resistance	10545-6	<175mm ³ Conforms	Dynamic (DCOF) Coefficient of Friction	ANSI A137.1:2012	≥ 0.42 Wet
Water Absorption	10545-3	≤0.5% Conforms	The Coefficient of Friction is a general guide only. Testing may vary with different production runs and with different testing labs. As noted in the American with Disabilities Act (ADA) the coefficient of friction varies considerably due to facts not under the control of entities such as the manufacturers and distributors. These factors include, but are not limited to, contaminants, slope of terrain, drainage conditions, adjacent surfaces, etc. Suitability for any installation can only be determined by a site examination of all conditions that could affect the slip resistance of the tile being installed. Continual cleaning and maintenance must be performed once the tile has been installed.		
Frost Resistance	10545-12	Resistant			
Slip Resistance	DIN 51130 R	R9			