

MARCA CORONA
ARKISTYLE TERRAZZO



Arkistyle Terrazzo is an eye-catching contemporary reinterpretation of terrazzo, distinguished by the presence of multicolored flakes, creating a sophisticated contrasting effect. By reworking the terrazzo concept in this way, Arkistyle offers a successful synthesis of natural charm in a decorative aspect. The two color options coordinate well with the Arkistyle Limestone palette and with many other tiles.



Terrazzo Cold (MCATCD)

12 x 24



9" Hex



Terrazzo Warm (MCATWM)

12 x 24



9" Hex

Colors are intended as a guide only and may vary from actual tile. Sizes listed are nominal. Please check samples before making final selection and to get actual dimensions for layout. See reverse side for additional product information.

Product Information

Colors

Terrazzo Cold	MCATCD
Terrazzo Warm	MCATWM

Size

12 x 24 (Rectified)	MCAT--/1224
8-1/2" Hex (Non-rectified)	MCAT--/9HX

Mosaic

2 x 2	MCAT--/22
-------	-----------

Trim

The surface bullnose is made from field tile that is cut, ground and reglazed.
3 x 24 Surface Bullnose MCAT--/SBN

Usage

Suitable for residential and commercial use.


Installation

To attain the proper mix of graphics and color it is important to pull from multiple boxes during installation, rotate pieces, and note the placement of the different images to get the proper final blend.

Most tile manufacturers recommend a maximum offset of 8" (20 cm) on all large format tiles when setting a running bond. Please refer to ANSI requirements for setting large format tiles, ANSI A 108.2 section 4.3.8. Using a leveling system can improve the installation of this product.

NOTE: The 8-1/2" Hex is non-rectified. The minimum recommended grout joint is 3/32" and it may be necessary to adjust the size of the grout joint during installation.

Please note that, while the 12x24 and the 8-1/2" Hexagon come in all the same colors, they are produced on different production lines and have their own graphic development. So they will coordinate with each other, but are not expected to have an exact match.

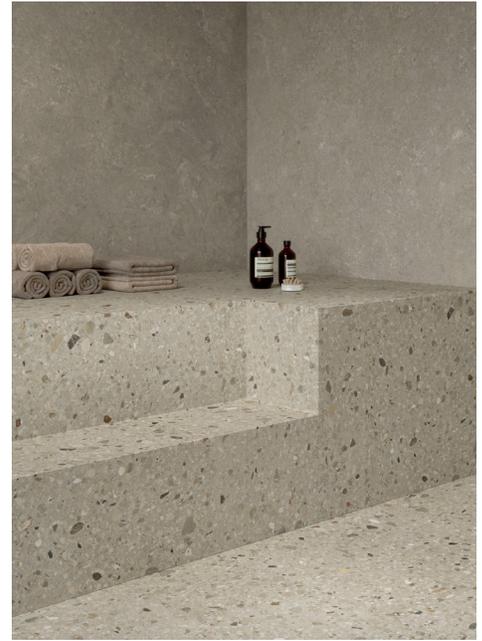

TECHNICAL INFORMATION

Physical Properties	Norms	Value
Deep Abrasion Resistance	10545-6	<150 mm ³ Conforms
PEI	N/A	See 'Deep Abrasion'
Water Absorption	10545-3	Conforms
Frost Resistance	10545-12	Resistant
Breaking Strength	10545-4	Conforms
Slip Resistance	DIN51130 DIN51097	R10 A + B
Dynamic Coefficient of Friction (DCOF)	BOT 3000 STANDARD ANSI A326.3:2021	≥ 0.42 Wet

** These results are for the natural finish and for the normal productions; if there is concern about a particular production, it should be tested. The Dynamic Coefficient of Friction is a general guide only. Testing may vary with different production runs and with different testing labs.

As noted in the Americans with Disabilities Act (ADA) the coefficient of friction varies considerably due to facts not under the control of entities such as the manufacturers and distributors. These factors include, but are not limited to, contaminants, slope of terrain, drainage conditions, adjacent surfaces, etc. Suitability for any installation can only be determined by a site examination of all conditions that could affect the slip resistance of the tile being installed. Continual cleaning and maintenance must be performed once the tile has been installed.

