


NAXOS

Authentic

The Authentic collection is inspired by nature and the enduring qualities of wood, capturing its warmth, strength, and timeless appeal. Through advanced production techniques, it faithfully replicates wood's natural grain, knots, and wide variation in tones. It embodies the essence of wood while meeting diverse design needs and offering all the technical advantages of glazed porcelain. The Original color has multiple tones mixed together that make it deep and rich and dark without being too dark or black.



Colors are intended as a guide only and may vary from actual tile. Sizes listed are nominal. Please check samples before making final selection and to get actual dimensions for layout. See reverse side for additional product information.

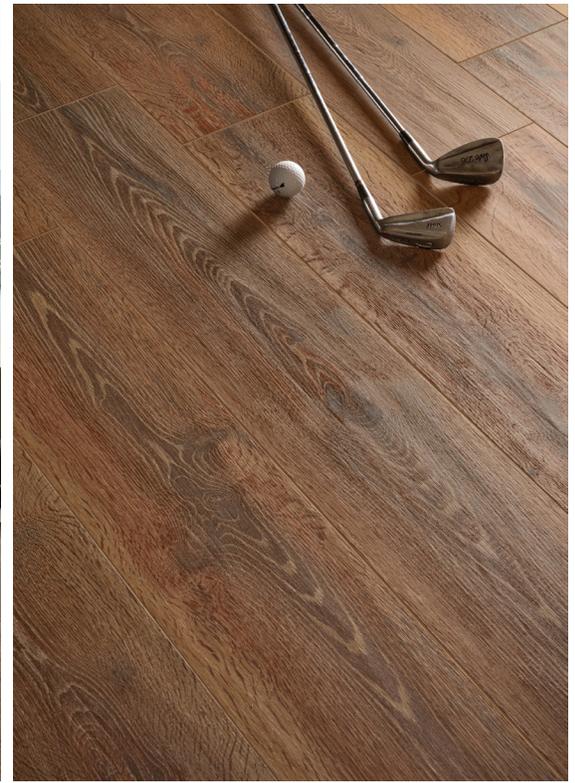

Size and Color - Rectified

8 x 48 Original NSACOL/848

Colors are intended as a guide only and may vary from actual tile. Sizes listed are nominal. Please check samples before making final selection and to get actual dimensions for layout.

Installation Information

We recommend using a tile leveling system to install this product.

Before installing the tile you should:

- Ensure the perfect planarity (flatness) of underlying floor base.
- Always double-check the quality of the tiles.
- When setting, tile should be only slightly staggered so that the ends of the tiles are within 8" or less from the ends of the corresponding staggered tile. (See figure 1).
- Staggered spacing does not need to be uniform, but should not exceed 8" recommendation.
- It is preferable to use a grouting material that matches the color of the tiles.

Usage

Authentic is suitable for residential and light commercial use.



Figure 1

As with all inkjet lines, there are many different graphics that are mixed and packed randomly. It is important to pull from multiple boxes during installation, rotate pieces and note the placement of the different images in order to get the proper final blend.

TECHNICAL INFORMATION

Physical Properties	Norms	Value	Physical Properties	Norms	Value
Breaking Strength	10545-4	Conforms	Dynamic Coefficient of Friction (DCOF)	BOT 3000E STANDARD ANSI A326.3:2021	≥ 0.42 Wet
Slip Resistance	DIN16165	R10			
Water Absorption	10545-3	Conforms	The Dynamic Coefficient of Friction is a general guide only. Testing may vary with different production runs and with different testing labs. As noted in the American with Disabilities Act (ADA) the coefficient of friction varies considerably due to facts not under the control of entities such as the manufacturers and distributors. These factors include, but are not limited		
Frost Resistance	10545-12	Resistant			

to, contaminants, slope of terrain, drainage conditions, adjacent surfaces, etc. Suitability for any installation can only be determined by a site examination of all conditions that could affect the slip resistance of the tile being installed. Continual cleaning and maintenance must be performed once the tile has been installed. For more information see our current handout *Americans with Disabilities Act and Slip Resistance of Tile*.

