

CORTINA

Cortina is a soft stone look at a competitive price. The 3 colors have a graphic with gentle veins that recall the look of the mountainside of the Alps in Northern Italy where Cortina is situated. With a 12x24 in a regular tile thickness and a 24x36 Paver, this line offers options for different areas.



Sabbia (TACASA)

Floor: 36 x 36; Wall: 24 x 36 Millerighe (Non-stock sizes)



Avorio (TACAAO)

Floor: 36 x 36; Wall: 24 x 36 Millerighe (Non-stock sizes)



Cenere (TACACE)

24 x 36 Paver


Product Information

Colors and Sizes (Rectified)

Avorio (TACAAO) 12 x 24



Cenere (TACACE) 12 x 24

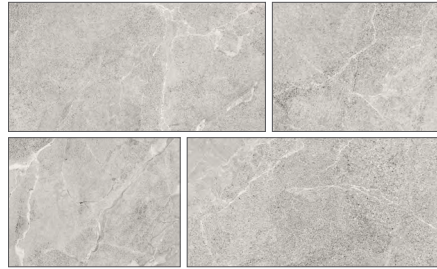

Sabbia (TACASA) 12 x 24



24 x 36 Paver (R11)



24 x 36 Paver (R11)



24 x 36 Paver (R11)



Colors are intended as a guide only and may vary from actual tile. Sizes listed are nominal. Please check samples before making final selection and to get actual dimensions for layout.

Mosaic

3 x 3 (TACA--/33)



Full sheet shown.
Available in all colors.

Trim TACA--/SBN 3 x 24 Surface Bullnose

The surface bullnose is made from field tile that is cut, ground and reglazed.

Usage

Cortina is suitable for walls and floors including residential and light commercial use.

Installation

To attain the proper mix of graphics and color, it is important to pull from multiple boxes during installation, rotate pieces, and note the placement of the different images to get the proper final blend.

Most tile manufacturers recommend a maximum offset of 8" (20 cm) on all large format tiles when setting a running bond. Please refer to ANSI requirements for setting large format tiles, ANSI A 108.2 section 4.3.8. Using a leveling system can improve the installation of this product.

Note about 24x36 Paver: The 24 x 36 Paver is suitable for most exterior paving applications including patios, pool decks, walkways, terraces, steps, and even most slopes. Of course, final suitability always comes down to the specific circumstances of the project, and proper cleaning and maintenance is required to maintain the slip resistance of any surface. Properly installed, 3/4" (2 cm) thick paver can be set on sand, gravel, grass or with a traditional thinset installation. The recommended minimum grout joint for the paver is 3/16". Pedestal applications are also possible with special installation requirements which are available upon request.

Technical Information

Physical Properties	Norms	Value	Physical Properties	Norms	Value
Abrasion Resistance	10545-7	<175mm3 Conforms	Slip Resistance	DIN 51130	12x24 - R10 24x36 P - R11
Water Absorption	10545-3	≤0.5% Conforms	Dynamic (DCOF) Coefficient of Friction	ASTM - USA ASTM C1028	≥ 0.42 Wet
Frost Resistance	10545-12	Resistant			

The Dynamic Coefficient of Friction is a general guide only. Testing may vary with different production runs and with different testing labs. As noted in the American with Disabilities Act (ADA) the coefficient of friction varies considerably due to facts not under the control of entities

such as the manufacturers and distributors. These factors include, but are not limited to, contaminants, slope of terrain, drainage conditions, adjacent surfaces, etc. Suitability for any installation can only be determined by a site examination of all conditions that could affect the slip resistance of the tile being installed. Continual cleaning and maintenance must be performed once the tile has been installed.