


SARTORIA

Decorata



Cementine-look porcelain decorative tiles reflect the strength of the traditional look while also celebrating a sense of contemporaneity. Sartoria's Decorata is in 6 x 6 making it a little different from all the 8 x 8 decos out there, and giving it additional uses where the smaller size is more appropriate. It comes in 3 solid colors - white, grey and a very soft blue - that look like they have been slightly worn over time. The 4 deco patterns incorporate combinations of the 3 field colors, plus a sweet pink in one of the patterns (Decorata 2). It's delicate and subtle and creates a final look that is charming and harmonious.

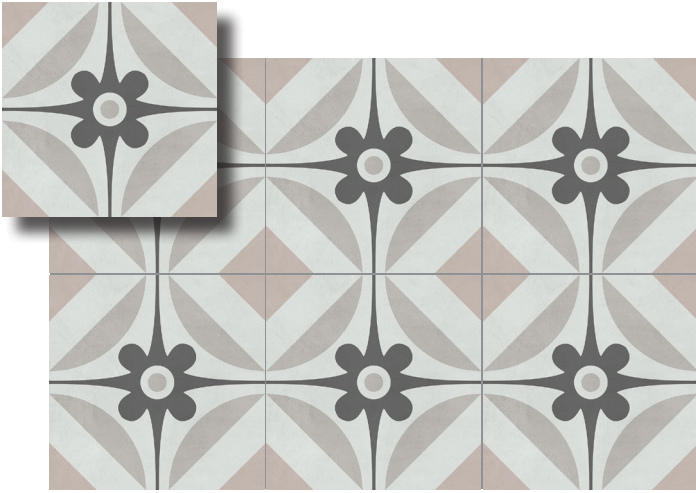


Decorata 2 (SADA/66D2)



Decorata 10 (SADA/66D10)



Decorata 1 (SADA/66D1)

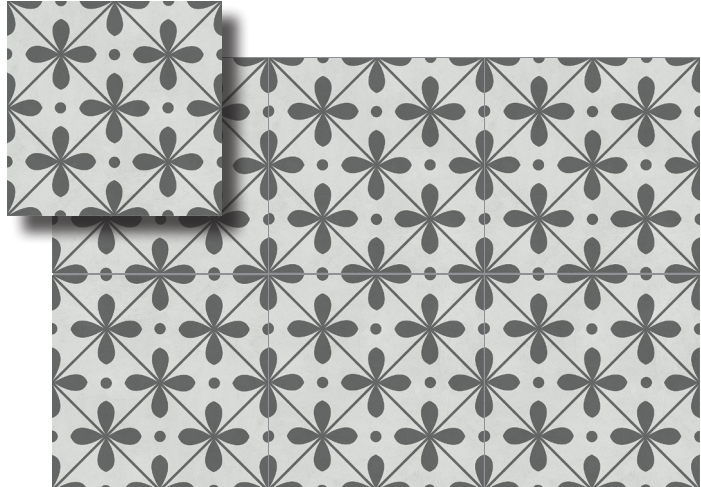

Decorata 12 (SADA/66I2)

Colors are intended as a guide only and may vary from actual tile. Sizes listed are nominal. Please check samples before making final selection and to get actual dimensions for layout.

Product Information

FIELD SIZE & COLORS:

6 x 6 (Non-rectified)



Azzurro
SADAAO/66



Bianco
SADABO/66



Grigio
SADAGO/66

DECOS: NON-RECTIFIED

6 x 6 Decorata SADA/66D-




Decorata 1
SADA/66D1



Decorata 2
SADA/66D2



Decorata 10
SADA/66D10



Decorata 12
SADA/66D12

COORDINATING TRIM

Expect shade variation between field and bullnose.

1/2 x 12 SBN (Pencil Bullnose/Jolly) SADA -- /112SBN



1/2 x 12 Pencil Bullnose/Jolly

Profile View



1/2 x 12 Pencil Bullnose/Jolly shown with field tile.



USAGE

Suitable for walls and floors including residential and moderate commercial use.

INSTALLATION

Please note that some patterns are complete within a single piece of tile while others need four tiles to complete each pattern. For the designs that require four pieces, Decorata 10, care should be taken during installation to make sure the tiles are correctly placed to achieve the desired final look. The minimum recommended grout joint is 3/32". Please note that the material is non-rectified. If using more than one item together (i.e. field and decos), please check the caliber and be aware that you may have to adjust the size of the grout joint to make your pattern work.

PHYSICAL CHARACTERISTICS

Physical Properties	Norms	Value
Abrasion Resistance	10545-7	PEI 4
Water Absorption	10545-3	Conforms
Frost Resistance	10545-12	Resistant
Breaking Strength	10545-4	Conforms
Slip Resistance	DIN 51130	R9
Dynamic Coefficient of Friction (DCOF)	STANDARD ANSI A137.1	Wet \geq 0.42

The Dynamic Coefficient of Friction is a general guide only. Testing may vary with different production runs and with different testing labs. As noted in the American with Disabilities Act (ADA) the coefficient of friction varies considerably due to facts not under the control of entities such as the manufacturers and distributors. These factors include, but are not limited to, contaminants, slope of terrain, drainage conditions, adjacent surfaces, etc. Suitability for any installation can only be determined by a site examination of all conditions that could affect the slip resistance of the tile being installed. Continual cleaning and maintenance must be performed once the tile has been installed.