

# DESIGN EVO



ESDE

Design Evo, Elios presents the next step in the evolution of design. It is a concrete look with the character of the traditional Italian “cementine”. Elios included slight imperfections in the designs and subtle differences from piece to piece along with an imprecise alignment when the pieces come together. These details are faithful to the inherent nature of the handmade cementine tiles and create intentional movement which enhances the authenticity of the final look. The decorative designs are sold individually, allowing people to select a specific pattern and use it in entire areas as a carpet or as an individual accent.



Colors are intended as a guide only and may vary from actual tile. Sizes listed are nominal. Please check samples before making final selection and to get actual dimensions for layout.

## Deco




Palazzo Ducale A  
ESDEPD/88A



Palazzo Ducale B  
ESDEPD/88B



Black & White X  
ESDEBW/88X

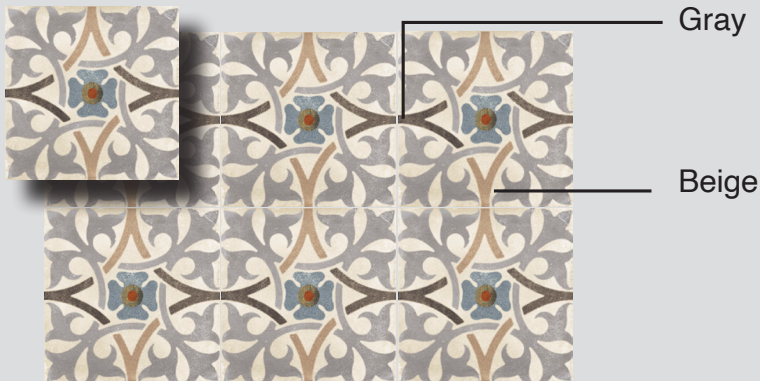

Palazzo Ducale E ESDEPD/88E

**Palazzo Ducale E:** Although this seems to be a “single piece” pattern, be careful to put the Gray & Beige in the same orientation when installing.

### 8 x 8 Black & White

The Black and White section of the Design Evo is a selection of decorative designs in the classic black and white color combination. As an aged cementine look, the pattern is in dark gray color on the soft cream background color.

Colors are intended as a guide only and may vary from actual tile. Sizes listed are nominal. Please check samples before making final selection and to get actual dimensions for layout.

## INSTALLATION INFORMATION

Suitable for walls and floors including residential and moderate commercial use. Please note that some patterns are complete within a single piece of tile while others need four tiles to complete each pattern. For the patterns that require four pieces, Palazzo Ducale A, single piece Pattern E and Black & White X, care should be taken during installation to make sure the tiles are correctly placed to achieve the desired final look. The minimum recommended grout joint is 3/32". Please note that the material is non-rectified. If using more than one item together, please check the caliber and be aware that you may have to adjust the size of the grout joint to make your pattern.

## TECHNICAL INFORMATION

Physical Properties	Norms	Value	Physical Properties	Norms	Value
Deep Abrasion Resistance	10545-7	PEI 4	Breaking Strength	10545-4	Conforms
			Slip Resistance	DIN51130	R10
Water Absorption	10545-3	Conforms	Dynamic Coefficient of Friction (DCOF)	BOT 3000 STANDARD ANSI A137.1	≥ 0.42 Wet
Frost Resistance	10545-12	Resistant			

The Dynamic Coefficient of Friction is a general guide only. Testing may vary with different production runs and with different testing labs. For more information, see our current handout *Americans with Disabilities Act and Slip Resistance of Tile*.