



Colors are intended as a guide only and may vary from actual tile. Sizes listed are nominal. Please check samples before making final selection and to get actual dimensions for layout. See reverse side for product information.

Product Information

IL COTTO epitomizes the essence of terracotta. It has a very natural, earthy look with plenty of movement including the little specks and imperfections that are present in real terracotta material, while also having the technical advantages of glazed porcelain. The theme continues with the palette of three warm colors - Fango (mud), Terra (earth) and Sabbia (sand).

Colors

Sizes - Rectified

Sabbia
(PAICSA)



12 x 24 (PAICSA/1224)



24 x 24 (PAICSA/2424)

Mosaic


(images not to scale)




3 x 3 (PAICSA/33)

The 3 x 3 mosaics may not be modular with the other sizes.

Terra
(PAICTA)



12 x 24 (PAICTA/1224)

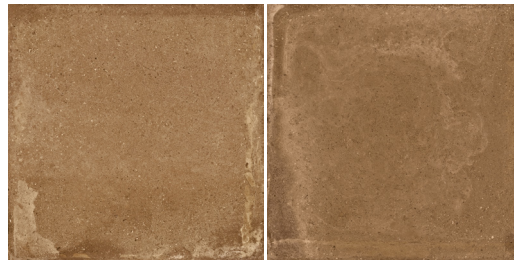

24 x 24 (PAICTA/2424)




3 x 3 (PAICTA/33)


Fango
(PAICFO)



12 x 24 (PAICFO/1224)

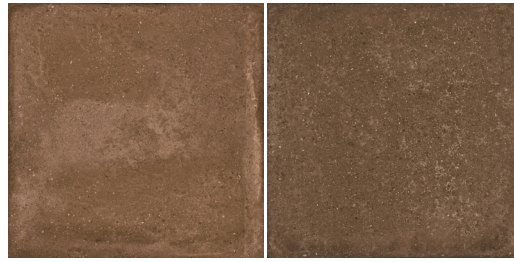

24 x 24 (PAICFO/2424)



3 x 3 (PAICFO/33)

Trim 3-1/2 x 24 Surface Bullnose PAIC--/SBN

The surface bullnose is made from field tile that is cut, ground and reglazed.

Usage and Installation

Il Cotto is suitable for residential and light commercial applications.

It should be noted that there is a wide range of variation with many different graphics that are mixed and packed randomly. It is important to blend the material well during installation, pulling from multiple cartons and laying out the pieces carefully to get the right blend. We suggest laying out an area before starting installation.

Most tile manufacturers recommend a maximum offset of 8" (20 cm) on all large format tiles when setting a running bond. Please refer to ANSI requirements for setting large format tiles, ANSI A 108.2 section 4.3.8. Using a leveling system can improve the installation of this product.

TECHNICAL INFORMATION

Physical Properties	Norms	Value
Deep Abrasion Resistance	10545-6	<130mm ³ Conforms
PEI	10545-7	PEI 4
Water Absorption	10545-3	Conforms
Frost Resistance	10545-12	Resistant
Breaking Strength	10545-4	Conforms
Slip Resistance	DIN51130 DIN51097	R10 B
Dynamic Coefficient of Friction (DCOF)	ANSI A326.3	≥ 0.42 Wet

The Dynamic Coefficient of Friction is a general guide only. Testing may vary with different production runs and with different testing labs. As noted in the American with Disabilities Act (ADA) the coefficient of friction varies considerably due to factors not under the control of entities such as the manufacturers and distributors. These factors include, but are not limited to, contaminants, slope of terrain, drainage conditions, adjacent surfaces, etc. Suitability for any installation can only be determined by a site examination of all conditions that could affect the slip resistance of the tile being installed. Continual cleaning and maintenance must be performed once the tile has been installed.