


koala



Koala takes its inspiration from the finest forms of Australian Eucalyptus wood, while offering all the technical advantages of rectified porcelain planks. The look is characterized by a delicate woodgrain with no knots and by rich variation as the striations move from dark to light and back again.

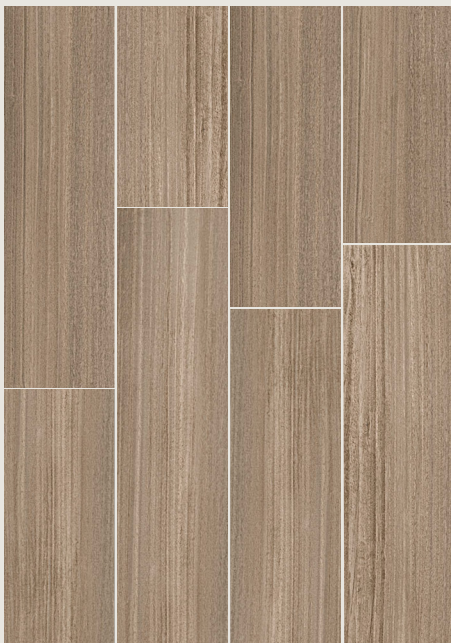

Adobe (IAKAAE)

(A)



Brown Sand (IAKABS)

(BS)



Tea (IAKATA)

(T)

Colors are intended as a guide only and may vary from actual tile. Sizes listed are nominal. Please check samples before making final selection and to get actual dimensions for layout. See reverse side for additional product information.

PRODUCT INFORMATION

Size - Rectified

8 x 48 IAKA--/848

Colors

IAKAAE Adobe (A)
IAKABS Brown Sand (BS)
IAKATA Tea (T)

Non-Stock Color

IAKABM Balsam (B)
8 x 48 IAKABM/848

Non-Stock Size - Available in all 4 colors

8 x 72 IAKA--/872

Installation Information

We recommend using a tile leveling system to install this product

Before installing the tile you should:

- Ensure the perfect planarity (flatness) of underlying floor base.
- Always double-check the quality of the tiles.
- When setting, tile should be only slightly staggered so that the ends of the tiles are within 8" or less from the ends of the corresponding staggered tile. (See figures 1 & 2)
- Staggered spacing does not need to be uniform, but should not exceed 8" recommendation.
- It is preferable to use a grouting material that matches the color of the tiles.




Fig. 1




Fig. 2

Usage

As with all inkjet lines, there are many different graphics that are mixed and packed randomly. It is important to pull from multiple boxes during installation, rotate pieces and note the placement of the different images in order to get the proper final blend.

Koala is suitable for residential to moderate commercial applications.

Technical Information

Physical Properties	Norms	Value
Flexion Resistance	10545-04	>45 N/mm ² (average value)
Water Absorption	10545-03	≤0,10%
Frost Resistance	10545-12	No Damage
Resistance to Surface Abrasion	10545-07	PEI 4
Slip Resistance	DIN51130	R9
** Dynamic (DCOF) Coefficient of Friction	DCOF	Wet ≥ 0.42

**The Dynamic Coefficient of Friction is a general guide only. Testing may vary with different production runs and with different testing labs. As noted in the American with Disabilities Act (ADA) the coefficient of friction varies considerably due to facts not under the control of entities such as the manufacturers and distributors. These factors include, but are not limited to, contaminants, slope of terrain, drainage conditions, adjacent surfaces, etc. Suitability for any installation can only be determined by a site examination of all conditions that could affect the slip resistance of the tile being installed. Continual cleaning and maintenance must be performed once the tile has been installed. For more information see our current handout *Americans with Disabilities Act and Slip Resistance of Tile*.