






Multiforme is a collection inspired by the world of resins and cements. Its name refers to the versatility of this look as it can serve many purposes in a customer's design. The four colors - white, light grey, soft blue and sage green - gently create a calming effect. The subtle variation and soft color palette make this an ideal choice for walls or floors, and allow it to coordinate with virtually any other tile.

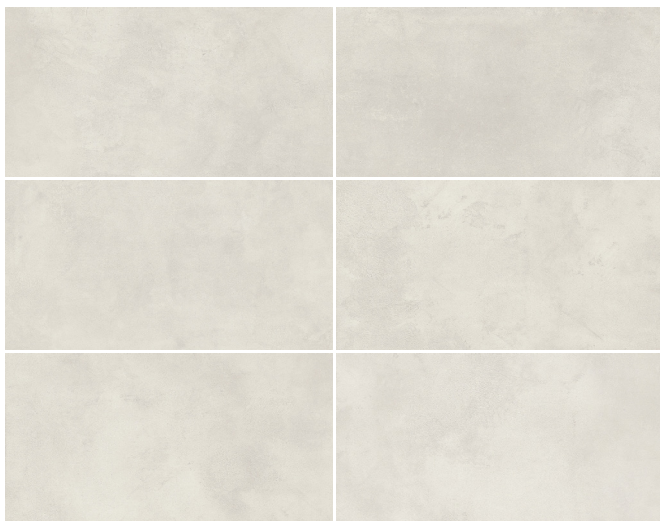


Calce (MCMECE)

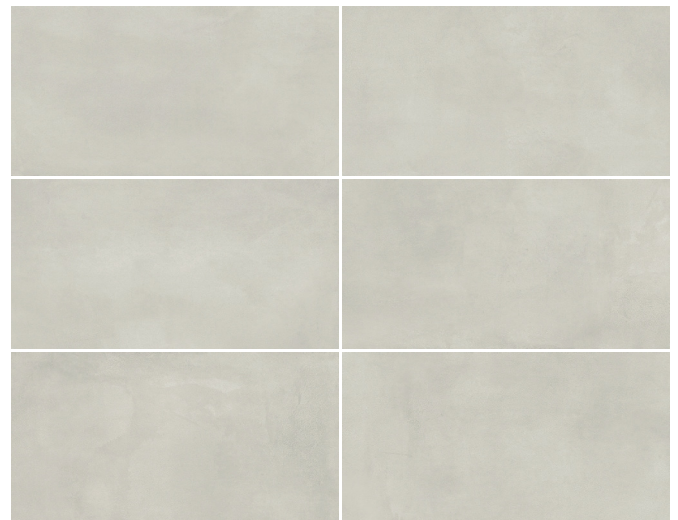

Perla (MCMEPA)

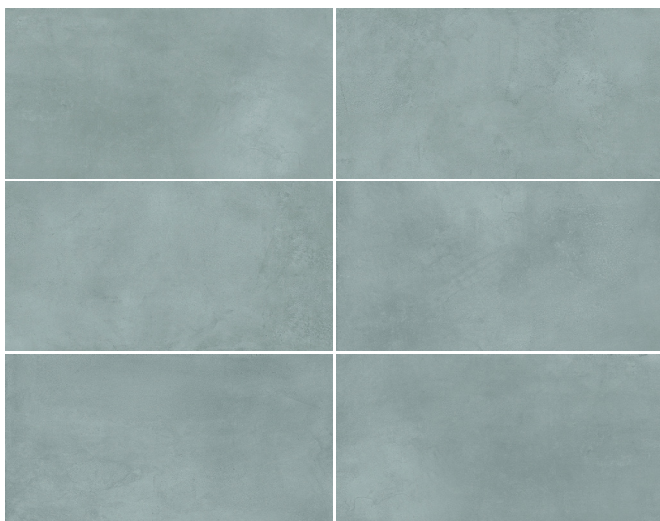

Acquario (MCMEAO)

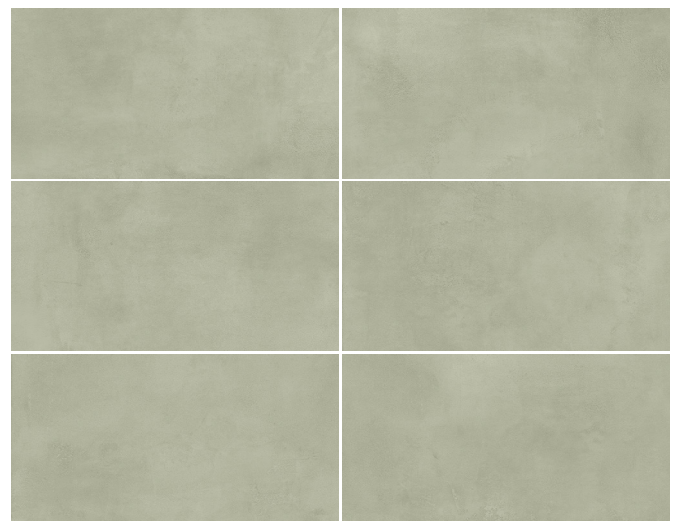

Lichene (MCMELE)

Colors are intended as a guide only and may vary from actual tile. Sizes listed are nominal. Please check samples before making final selection and to get actual dimensions for layout.

PRODUCT INFORMATION

COLORS

MCMEAO	Acquario (Soft blue)
MCMECE	Calce (white)
MCMELE	Lichene (Sage green)
MCMEPA	Perla (Light grey)

Note: The 12x24 is cut from larger sizes, and so different productions may be slightly different thicknesses depending on which size was cut. The difference is truly minimal, and might only be noticeable if mixing colors that happen to be produced from different sizes.

SIZE (Rectified)

12 x 24 MCME--/1224

MOSAIC


2 x 2 MCME--/22




Calce
MCMECE/22



Perla
MCMEPA/22



Acquario
MCMEAO/22



Lichene
MCMELE/22

TRIM

The surface bullnose is made from field tile that is cut, ground and reglazed.

3 x 24 Surface Bullnose MCME--/SBN

USAGE

Multiforme is suitable for both residential and commercial installations.

INSTALLATION

To attain the proper mix of graphics and color it is important to pull from multiple boxes during installation, rotate pieces, and note the placement of the different images to get the proper final blend.

Most tile manufacturers recommend a maximum offset of 8" (20 cm) on all large format tiles when setting a running bond. Please refer to ANSI requirements for setting large format tiles, ANSI A 108.2 section 4.3.8. Using a leveling system can improve the installation of this product.

TECHNICAL INFORMATION - UGL CLASSIFICATION

Physical Properties	Norms	Value
Deep Abrasion Resistance	10545-6	<175mm ³ Conforms
PEI	N/A	See 'Deep Abrasion'
Water Absorption	10545-3	Conforms
Frost Resistance	10545-12	Resistant
Breaking Strength	10545-4	Conforms
Slip Resistance	DIN51130	R10
Dynamic Coefficient of Friction (DCOF)	BOT 3000 STANDARD ANSI A137.1	≥ 0.50 Wet

The Dynamic Coefficient of Friction is a general guide only. Testing may vary with different production runs and with different testing labs. As noted in the American with Disabilities Act (ADA) the coefficient of friction varies considerably due to facts not under the control of entities such as the manufacturers and distributors. These factors include, but are not limited to, contaminants, slope of terrain, drainage conditions, adjacent surfaces, etc. Suitability for any installation can only be determined by a site examination of all conditions that could affect the slip resistance of the tile being installed. Continual cleaning and maintenance must be performed once the tile has been installed.

