
PLATFORM



Platform is a metallic look that was inspired by aged metal plates. The graphic includes oxidation marks and calcium deposits that would appear on metal cladding over time as it was exposed to the elements. The surface has some texture, with matte areas enhanced by puddles of sheen. The really eye-catching feature of this line is the rich color palette. Each color has a mixture of hues, including both cool and warm tones, that combine to create a final look that is appealing and accessible while also being modern.

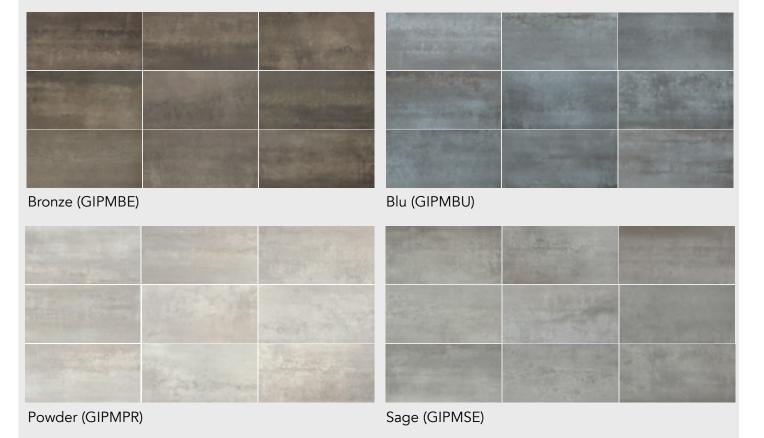

Colors are intended as a guide only and may vary from actual tile. Sizes listed are nominal. Please check samples before making final selection and to get actual dimensions for layout. See reverse side for additional product information.

Product Information

Colors

GIPMBE Bronze (Charcoal with brown)
GIPMBU Blu (Subtle blue tone with browns)

GIPMPR Powder (Light silver grey with taupe/beige)
GIPMSE Sage (Medium bluish grey with iron/taupe)

Sizes (Rectified)

12 x 24 GIPM--/1224 4 x 12 GIPM--/412 2 x 8 GIPM--/28

Mosaics

Brick GIPM--/BK Leaf GIPM/LF



Brick Mosaic



Brick Mosaic - Available in all 4 colors. Pieces are approx. 1-3/8" x 2-7/8".

Leaf Mosaic - The Leaf mosaic is made up of elongated hexagon pieces that are approximately 4-1/4" x 1-1/2". All four Platform colors are blended together to create a rich and versatile decorative.

Trim

The surface bullnose is made from field tile that is cut, ground and reglazed.

2 x 24 Surface Bullnose GIPM--/SBN

Usage

Platform is suitable for residential and light to moderate commercial applications.

Non-stock sizes - Available for projects that meet minimum quantities

Non-stock prices are subject to change and should be reconfirmed at time of order.

Rectified - Available in all colors

12 x 12 GIPM--/1212 12 x 48 GIPM--/1248 4 x 24 GIPM--/424 24 x 48 GIPM--/2448

24 x 24 GIPM--/2424

Installation

It is important to blend tile within each carton and from multiple cartons during installation, as well as changing the orientation of pieces with similar graphics to attain a proper mix.

Most Italian manufacturers recommend a maximum offset of 8" (20 cm) on all large format tiles when setting a running bond. Please refer to ANSI requirements for setting large format tiles, ANSI A 108.2 section 4.3.8. Using a leveling system can improve the installation of this product.

Physical Properties

y					
Physical Properties	Norms	Value Natural	Physical Properties		Value Natural
Average Bending Strength	10545-04	45,5 N/mm2 (average value)	PEI	10545-7	Powder - V Blu Bronze - IV Sage
Water Absorption	10545-03	≤ 0,05	Slip Resistance	DIN 51130 DIN 51097	R10 A+B
Frost Resistance	10545-12	Resistant	** Dynamic (DCOF) Coefficient of Friction	ANSI A137.1 BOT 3000E	Wet ≥ 0.42





The Dynamic Coefficient of Friction is a general guide only. Testing may vary with different production runs and with different testing labs. As noted in the American with Disabilities Act (ADA) the coefficient of friction varies considerably due to facts not under the control of entities such as the manufacturers and distributors. These factors include, but are not limited to, contaminants, slope of terrain, drainage conditions, adjacent surfaces, etc. Suitability for any installation can only be determined by a site examination of all conditions that could affect the slip resistance of the tile being installed. Continual cleaning and maintenance must be performed once the tile has been installed.



