

SEGESTA

Segesta is a classic marble look in 4 colors and multiple sizes. In addition to 12 x 24 and 24 x 48 (in 3 of the colors), it comes in 12 x 12, a size which continues to grow in popularity and a 3" Hexagon which add value to the line and makes it quite complete. The depth of color and distinct veins are expertly rendered to create a look that defines purity and refinement. Colors and sizes can be mixed together to create installations that elevate a space where the look of marble becomes the main character.



Moro (LFSAMO)
Floor: 24 x 48 (non-stock)



Ghiaccio (LFSAGO)
Wall: 24 x 48



Avorio (LFSAAO) 12 x 12 with
Crema (LFSACA) 12 x 12

Product Information

Colors and Sizes (Rectified)

12 x 12	LFSA--/1212
12 x 24	LFSA--/1224
24 x 48*	LFSA--/2448

*Due to the special packing required for the large format tiles, orders for the 24x48 size must be for full box quantities only & we are not able to fill orders on the same day as placed.

Colors are intended as a guide only and may vary from actual tile. Sizes listed are nominal. Please check samples before making final selection and to get actual dimensions for layout.

Avorio (LFSAAO)



12 x 12 12 x 24



24 x 48

Crema (LFSACA)



12 x 12 12 x 24



24 x 48

Ghiaccio (LFSAGO)




12 x 12 12 x 24



24 x 48

Moro (LFSAMO)

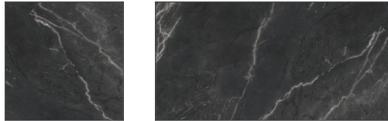

12 x 12 12 x 24

Mosaic 3" Hex (LFSA--/3HX)



Trim

LFSA--/SBN 3 x 24 Surface Bullnose

The surface bullnose is made from field tile that is cut, ground and reglazed.

Usage & Installation

Segesta is suitable for residential and light commercial applications. To attain the proper mix of graphics and color, it is important to pull from multiple boxes during installation, rotate pieces, and note the placement of the different images to get the proper final blend.

Most Italian manufacturers recommend a maximum offset of 8" (20cm) on all large format tiles when setting a running bond. Please refer to ANSI requirements for setting large format tiles, ANSI A 108.2 Section 4.3.8. There are special setting requirements and materials for large format tiles. Please refer to the TCNA Handbook and guidelines by your mortar manufacturer for more information.

Technical Information

Physical Properties	Norms	Value	Physical Properties	Norms	Value
Deep Abrasion Resistance	UNI EN ISO 10545-6	126 mm ³	Slip Resistance	DIN 51130	R9 A
Water Absorption	UNI EN ISO 10545-3	≤0.5% Conforms	Dynamic (DCOF) Coefficient of Friction	BOT3000E ANSI A326.3:2022	≥ 0.42 Wet
Frost Resistance	UNI EN ISO 10545-12	Resistant			

The Dynamic Coefficient of Friction is a general guide only. Testing may vary with different production runs and with different testing labs. As noted in the American with Disabilities Act (ADA) the coefficient of friction varies considerably due to facts not under the control of entities

such as the manufacturers and distributors. These factors include, but are not limited to, contaminants, slope of terrain, drainage conditions, adjacent surfaces, etc. Suitability for any installation can only be determined by a site examination of all conditions that could affect the slip resistance of the tile being installed. Continual cleaning and maintenance must be performed once the tile has been installed.