

Elios

TROPICAL

Tropical is a series with two distinct parts. The 2 x 10 Porcelain Wall is glossy; its surface has gentle undulations, soft shade variation and movement, and deliberate irregularities like uneven glazing along the edges which give it a hand-crafted appearance. The 8-1/2" Hexagon offers another aesthetic from the ceramic tradition. It has a matte finish with a slightly uneven surface and some graphic movement. The two options can be used together as a coordinated wall and floor combo, or they can be used on their own, or even paired with many other products.



2 x 10 Porcelain Wall Glossy



Bianco (ESTLBOG/210)



Grigio (ESTLGOG/210)



Azzuro (ESTLAOG/210)




Petrolio (ESTLPOG/210)




Salvia (ESTLSAG/210)


8-1/2" Hex Porcelain Matte

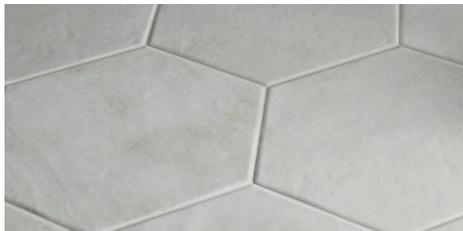

Bianco (ESTLBOM/9HX)

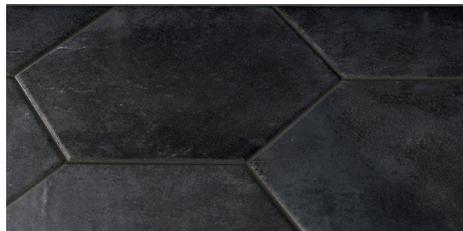

Nero (ESTLNOM/9HX)

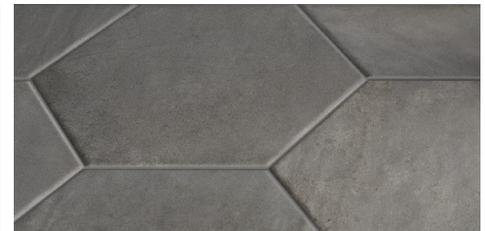

Grigio (ESTLGOM/9HX)



Azzuro (ESTLAOM/9HX)



Petrolio (ESTLPOM/9HX)



Salvia (ESTLSAM/9HX)

Colors are intended as a guide only and may vary from actual tile. Please check tile samples before making final selections. See reverse side for additional product information.

PRODUCT INFORMATION

Colors for Wall and Hex

ESTLAO	Azzuro	ESTLGO	Grigio	ESTLPO	Petrolio
ESTLBO	Bianco	ESTLNO	Nero*	ESTLSA	Salvia

*Nero Glossy (NOG) is not available in 2x10, Brick Mosaic and 1/2 x 12 Pencil Bullnose

Porcelain Wall - Non-Rectified Glossy Glazed Porcelain (Colors shown on the front)

2 x 10 Glossy (9.5 mm) ESTL--G/210

Mosaic

1 x 2 Brick Mosaic Glossy ESTL--G/BK



1 x 2 Brick Mosaic Glossy

The Brick Mosaic is cut from the 2x10 Porcelain Wall. There is some uneven thickness and surface that is emphasized when it is cut into approximately 1" x 2" pieces. Cutting the pieces also means that some edges have the rough or glazed edge and others are straight. This creates an uneven, three dimensional surface with natural lippage and occasional chipping that add to the hand-crafted look.

Note: The top layer of glaze on the 2 x 10 Porcelain Wall is a special application that creates the deep look of this tile. The glaze does not reach all the edges of every piece, leaving a slightly rough texture along those edges. This is an intentional characteristic of this tile and adds to the final look and feel of the installation. Extra care must be taken when grouting to wash the grout down to the proper level leaving the rough edges exposed in order to obtain the full effect.

Coordinating Trim for Walls

Expect variation in color and size between field and trims. There is limited shade variation on the pencil bullnose; the shading is more uniform than the field tile.

ESTL--G/SBN 1/2 x 12 SBN (Pencil Bullnose/Jolly) Glossy




Coordinating Trim and profile (Right), Trim with field tile (top)

Porcelain Hex - Non-Rectified Matte Glazed Porcelain (Colors shown on the front)

8-1/2" Hex (10 mm) ESTL--M/9HX

Due to the nature of this material and small carton size, **orders for the 8-1/2" Hex must be for full boxes only.** Please note that we do not accept returns in general. In the rare occurrence that we make an exception and do take a return of this product, only factory sealed full boxes can be accepted.

*8-1/2" hex dimensions are approximate.

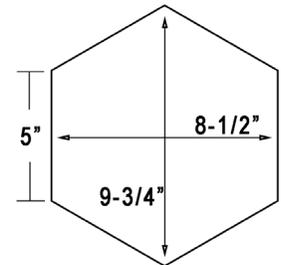

Installation Information

The Tropical Hexagon is suitable for walls and floors including residential and light commercial use. The minimum recommended grout joint is 3/32". Please note that this material is non-rectified. If using more than one item (i.e. Porcelain Wall and Porcelain Hex) or multiple colors together, please check the caliber and be aware that you may have to adjust the size of the grout joint to make your pattern work. As with all inkjet products, there are many different graphics that are mixed and packed randomly. It is important to pull from multiple boxes during installation, rotate pieces, and note the placement of the different images to get the proper final blend.

Technical Information (8-1/2" Hex Matte)

Physical Properties	Norms	Value	Physical Properties	Norms	Value
Water Absorption	10545-3	≤0.5% Conforms	Dynamic (DCOF) Coefficient of Friction	ANSI A 326.3	≥ 0.42 Wet
Frost Resistance	10545-12	Resistant	Resistance to Surface Abrasion (PEI)	10545-7	III: NO IV: AO, GO, PO V: BO, SA
Slip Resistance	DIN51130	R9			

The Dynamic Coefficient of Friction is a general guide only. Testing may vary with different production runs and with different testing labs. As noted in the American with Disabilities Act (ADA) the COF varies considerably due to facts not under the control of entities such as the manufacturers and distributors. These factors include, but are not limited to, contaminants, slope of terrain, drainage conditions, adjacent surfaces, etc. Suitability for any installation can only be determined by a site examination of all conditions that could affect the slip resistance of the tile being installed. Continual cleaning and maintenance must be performed once the tile has been installed.